



## *Multipoint Lock for Stable Doors*

ML95R Interlocking Stable Door

T 01726 871 025 E [sales@coastal-group.com](mailto:sales@coastal-group.com) W [coastal-group.com](http://coastal-group.com)  
© Coastal Specialist Ironmongery Ltd



# COASTAL

*Shaping the future.*

## STABLE DOOR MULTIPOINT LOCK - INTERLOCKING

### TECHNICAL INFORMATION:

- 92mm Euro Lock Centre
- 45mm & 55mm Backset option
- Universal Lock Handing (Latch Release)



### FEATURES:

- Purpose made multipoint lock system for stable door
- Shootbolt interlocks top and bottom halves to form one door for extra strength
- Handle on the top lock is higher up so it doesn't clash with the door drip detail
- Adjustable roller ball on bottom leaf for ease of opening & closing
- Longer faceplate to assist with taller door sets and flexibility of door split
- New Winkhaus premium finish suitable for acidic timbers
- 20mm faceplate to bring in line with the rest of the Winkhaus family
- Uses same keeps as the rest of the Winkhaus range
- Tapered hooks for optimum security, ease of operation and weather protection
- High performance gear box tested to 100,000 cycles
- Croppable - up to 530mm can be cropped from the top, up to 440mm from the bottom, this leaves approximately 25mm from the screw holes

### KEY FEATURES:

- Shootbolt interlocks top and bottom halves to form one door for extra strength



- Handle on the top lock is higher up so it doesn't clash with the door drip detail (Other stable door locks where the handle is lower clashes with the door drip detail)



# STABLE DOOR MULTIPOINT LOCK - INTERLOCKING

## LOCK CODE

LOCK PART NUMBER	HANDING	BACKSET	FACEPLATE	FINISH	UNITS
ML95R-45-SV	Universal	45mm	20mm Square End	SV	Each
ML95R-55-SV	Universal	55mm	20mm Square End	SV	Each

## KEEP CODES

KEEP PART NUMBER	PRODUCT DESCRIPTION	HANDING	CENTRE	FINISH	UNITS
MK7-FLU-SV	Single keep	Universal		SV	Each
MK9-28-LH-SV	Centre keep	Left	28mm	SV	Each
MK9-28-RH-SV	Centre keep	Right	28mm	SV	Each
MK9-33-LH-SV	Centre keep	Left	33mm	SV	Each
MK9-33-RH-SV	Centre keep	Right	33mm	SV	Each
MK7-FTB-AAL	Flush single keep	Universal	Adjustable	SV	Each
MK9-FTB-28-AAL	Non-handed premium flush centre keep	Universal	20mm	SV	Each

## FINISHES:


See page 6 for product drawings




SV  
Silver Passivated

## Keep Handing (as viewed from outside)

Left Hand Lock




Right Hand Lock





STABLE DOOR MULTIPOINT LOCK - INTERLOCKING


What are faceplate widths?

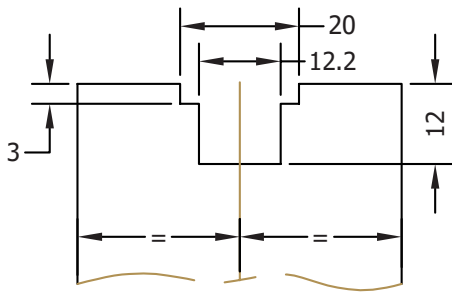

**SECTION A-A**  
**EURO GROOVE**


- Typical faceplate width is 20mm, this is measured across the face of the lock
- The diagram above shows typical routing detail

How to release the latch on a non-handled (universal) multipoint lock

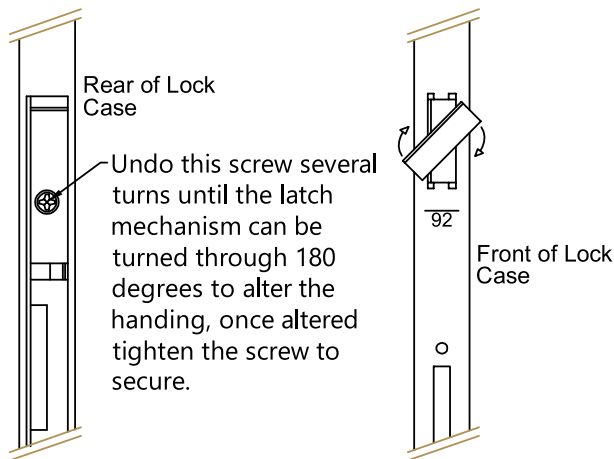


**Detail A**  
**Latch Release**


MK7-FTB-AAL

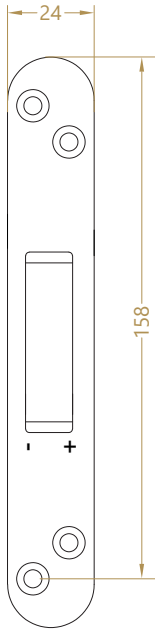



MK7-FLU

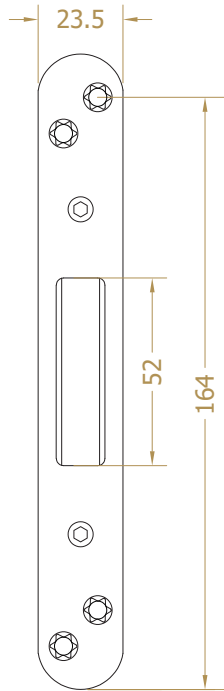

MK9-FTB-28-AAL

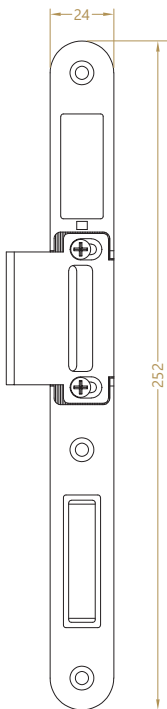

MK9-28

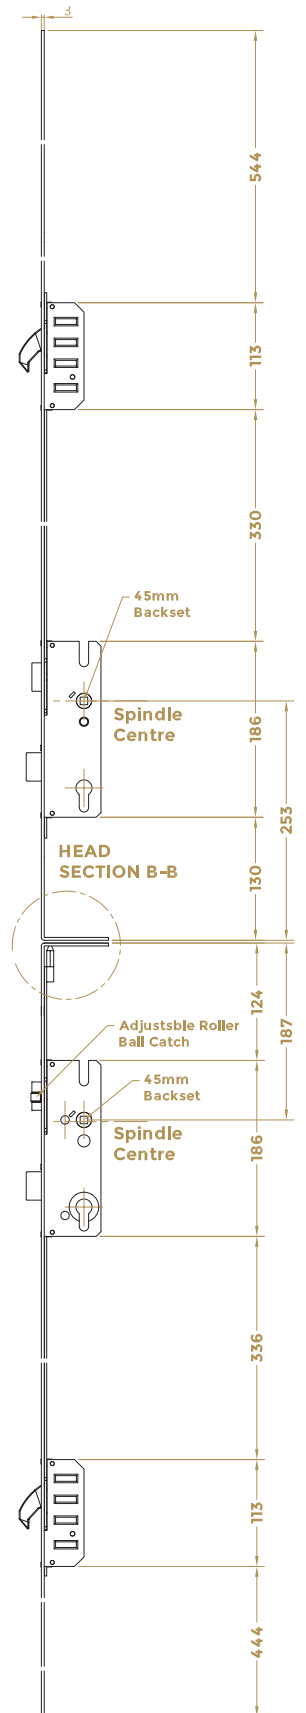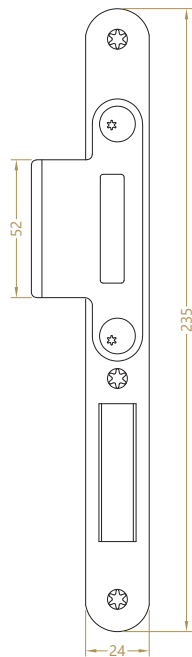

## MAINTENANCE AND LUBRICATION GUIDE

---

Winkhaus locking systems are put through very stringent tests to meet the requirements of today's environment, including cycle testing.

The current requirement for PAS 23/24 is 50,000 full cycles of the door-set in order to simulate 10 years average use.

The requirement for maintenance is totally dependent on usage and environment, i.e. In areas of high dust or corrosive atmospheres, the requirement for lubrication will be more frequent than normal.

We therefore recommend that a light application of our GLS200 Lubricant Spray be used into the apertures of the hooks, dead-bolt and latch and into both sides of the cylinder. In normal usage Bi-annual application would be more than sufficient.

To prevent any damaging effect to the corrosion protection of Winkhaus fittings, only PER neutral cleaning and care agents should be used, which do not contain any abrasives.

We also strongly recommend that the door set is checked over for any movement, swelling or distortion of either sash or frame, if necessary check for debris of any kind interfering with any of the moving parts behind the mechanism itself. This operation will require the mechanism to be removed and replaced by a competent person. Any loose or missing fixing screws should be tightened or replaced as required.

Under no circumstances should any aspect of the lock or cylinder be tampered with in any way, as this may affect both the serviceable life and guarantee.

